



6-Port Gigabit Managed

Industrial POE Switch

IS104GPS-2F



Product Introduction:

IS104GPS-2F is a 6-port Gigabit managed industrial POE switch, providing 4 Gigabit POE ports and 2 Gigabit optical ports. Each POE port can provide up to 30W of power, which can be applied to IEEE802.3af/at compatible powered devices (PDs), especially suitable for applications where it is difficult to provide AC power and the wiring cost is high. EMC industrial grade 4 protection performance; corrugated high-strength aluminum profile shell, IP40 grade, low power design, anti-vibration rail installation, -40 °C -75 °C operating temperature, can work in harsh environments; IS104GPS - 2F can also support rich network management functions: RSTP, VLAN, QoS, SNMPv1/v2c/v3, IEEE802.1X, SSH/SSL, port mirroring, port aggregation and other rich redundancy, switching and security management features, making it a reliable solution for intelligent transportation, video surveillance and other harsh industrial environments.

Features:

Standards

- IEEE 802.3: Ethernet Media Access Control (MAC) Protocol
- IEEE 802.3i:10BASE-T Ethernet
- IEEE 802.3u:100BASE-TX Fast Ethernet
- IEEE 802.3ab:1000BASE-T Gigabit Ethernet
- IEEE 802.3z:1000BASE-X Gigabit Ethernet (fiber)
- IEEE 802.3ad: A standard method for performing link aggregation
- IEEE 802.3x: Flow Control
- IEEE 802.1p: LAN Layer 2 QoS/CoS protocol for traffic priority (multicast filtering function)
- IEEE 802.1q: VLAN Bridge Operation
- IEEE 802.1d: STP Spanning Tree
- IEEE 802.1s:MSTP Spanning Tree
- IEEE 802.1w: RSTP Spanning Tree
- IEEE 802.3af
- IEEE 802.3at

Switching characteristics

- MAC address table : 8K
- Port buffer : 4.1 Mb
- 100M forwarding speed: 148810pps
- Gigabit forwarding speed: 1488100pps

Maximum filtering speed at 100M: 148810pps

Gigabit maximum filtering speed: 1488100pps

Transmission mode: store and forward

Backplane bandwidth: 12 Gbps

Switching Delay: <5us

Communication Interface

Optical port : 2*1000Base-X (SFP)

RJ45 port : 4*10/100/1000Base-Tx RJ45 PoE ports

Front panel indicator

Power indicator: P1, P2

System indicator: SYS

Alarm indicator: ALM

Interface indicator: Link & Access F1~ F2

Network port indicator: POE, Link&Act 1~4

Power supply

Input voltage: 48-56 V DC

Input mode: pluggable 5-core 5.08 mm pitch terminal block

Support dual DC power backup, built-in overcurrent protection

Power supply supports reverse polarity protection

Power consumption (optional)

No-load power: 6W@52V DC

Full load power: 126W@52V DC (including POE output)


Physical properties

Housing: IP40 protection, corrugated high-strength metal housing

Installation: DIN rail installation

Dimensions (L × W × H): 163 mm × 110 mm × 46.5 mm

Weight: 0.7 kg

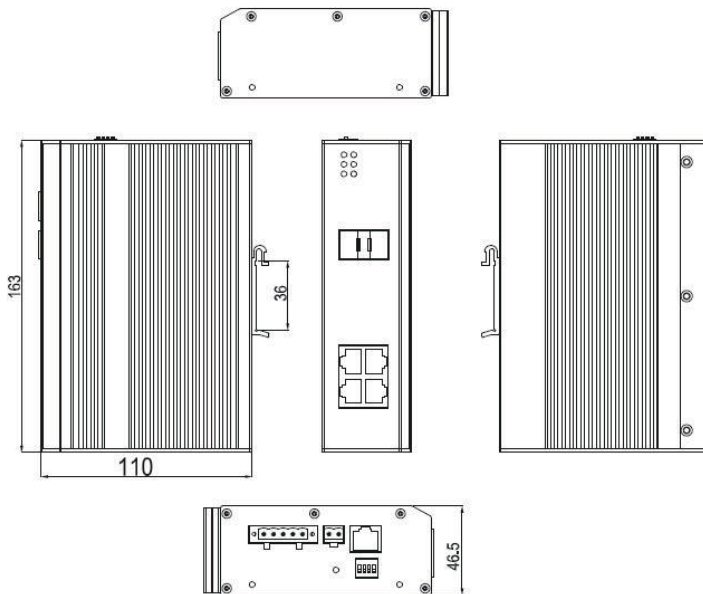

Industry standard

EMI:FCC CFR47 Part 15, EN55022/CISPR22, Class A

EMS:

IEC61000-4-2 (ESD): $\pm 8\text{kV}$ (contact), $\pm 15\text{kV}$ (air)

IEC61000-4-3 (RS): 10V/m (80MHz-2GHz)

IEC61000-4-4 (EFT): Power Port: $\pm 4\text{kV}$; Data Port: $\pm 2\text{kV}$

IEC61000-4-5 (Surge): Power Port: $\pm 2\text{kV/DM}$, $\pm 4\text{kV/CM}$; Data Port: $\pm 6\text{ kV}$

IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz)

IEC60068-2-6 (Vibration)

IEC60068-2-27 (Shock)

IEC60068-2-32 (Free Fall)

Working environment

Operating temperature: $-40 \sim 75\text{ }^{\circ}\text{C}$

Storage temperature: $-40 \sim 75\text{ }^{\circ}\text{C}$

Relative humidity: $5\% \sim 95\%$ (no condensation)

Certification

CE, FCC, RoHS

Mean time between failures

360,000 hrs

Installation method:

Before installation, you must confirm the operating environment of the equipment: power supply voltage, installation space, installation method, etc. Please carefully confirm the following installation requirements:

- ✧ Check that the required cables and connectors are present for installation
- ✧ According to reasonable configuration requirements, check whether the cables are in place (no more than 100m)
- ✧ The product does not provide installation components. Users need to prepare the components of the selected installation type: screws, nuts and tools, etc. to ensure reliable installation

Power requirement: 48-56V DC


Environmental requirements :

Working temperature: -40~75℃

Storage temperature: -40~75℃

Relative humidity: 5% to 95% (no condensation)

Power access

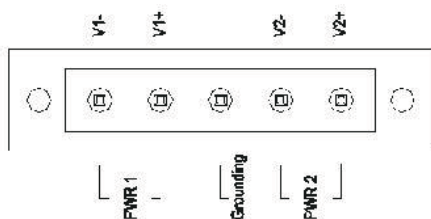


5pin 5.08mm terminal

Input range: 48-56VDC

P1&P2 dual redundant power supply,

Support reverse connection protection function

Ground protection

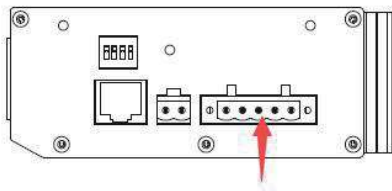

Connect the ground terminal

Rail installation

